

## Plastic Poly-V Belt Conveyor Roller Tapered Drum For Curved Conveyor Diameter 50mm 60mm 70mm

Our Product Introduction

### Basic Information

- Place of Origin: China Jiangsu
- Brand Name: Winroller
- Certification: CE,SGS,ISO9001,ROHS,UL
- Model Number: Winroller Plastic Poly-V Belt Conveyor Roller Tapered Drum For Curved Conveyor
- Minimum Order Quantity: 1stick
- Price: Contact Us
- Packaging Details: Wooden case
- Delivery Time: 7-15 word days
- Payment Terms: TT, L/C
- Supply Ability: 1000000/year



### Product Specification

- Product Name: Plastic Poly-V Belt Conveyor Roller Tapered Drum For Curved Conveyor
- Roller Material: Galvanized Steel, Stainless Steel
- Pipe Diameter: 50mm, 60mm, 70mm, Customised
- Application: For Curved Conveyor
- Drive Model: Poly-V Belt
- Covering Material: Natural Rubber, Nitrile Rubber, Polyurethane
- Cone Sleeve Length: 300MM, 350MM, 400MM, 450MM, 500MM, 550MM, 600MM, 650MM, 700MM, 750MM, 800MM, 850MM
- Advantage: High Speed, Low Noise
- Highlight: **Tapered Drive Rollers For Conveyors,  
Customised Drive Rollers For Conveyors,  
Customised conveyor system rollers**



for more products please visit us on [drum-roller.com](http://drum-roller.com)

## Product Description

### Function of Plastic Poly-V Belt Conveyor Roller Tapered Drum For Curved Conveyor

Poly-V belt pulley drive, high-speed silent  
 Suitable for light and medium load conveying  
 The roller is light and has a good starting performance

**Remark:**


Both galvanized steel and stainless steel tube are available

### Application of Plastic Poly-V Belt Conveyor Roller Tapered Drum For Curved Conveyor

Used to facilitate the turning of items in various transportation and logistics systems, they play a crucial role in many industries: Express E-Commerce, Warehousing and distribution, Airport Logistics, etc.

### Technical Parameters of Plastic Poly-V Belt Conveyor Roller Tapered Drum For Curved Conveyor


**Profile and parameter introduction**

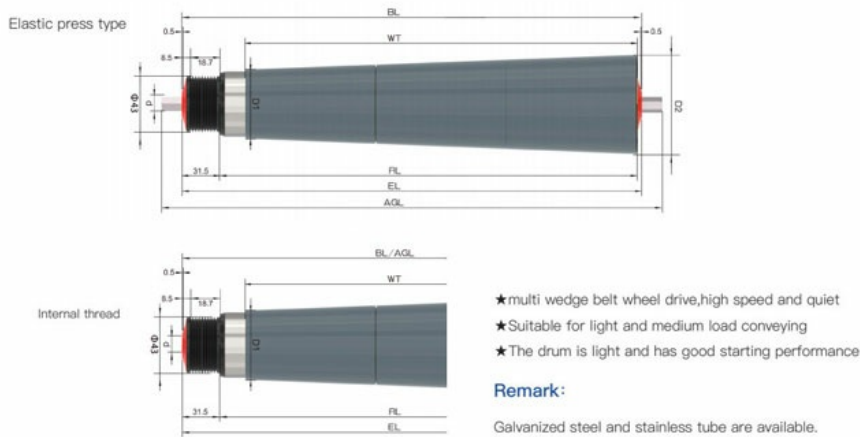

Plastic Poly-V Belt Conveyor Roller Tapered Drum For Curved Conveyor

| Pipe diameter and wall thickness | Axis center   | Sleeve length | D1    | D2     |
|----------------------------------|---------------|---------------|-------|--------|
| φ50*1.5                          | 11hex, φ12/15 | 300           | φ56   | φ74.4  |
|                                  |               | 350           | φ53.1 | φ74.4  |
|                                  |               | 400           | φ56   | φ80.8  |
|                                  |               | 450           | φ53.1 | φ80.8  |
|                                  |               | 500           | φ56   | φ87.1  |
|                                  |               | 550           | φ53.1 | φ87.1  |
|                                  |               | 600           | φ56   | φ93.7  |
|                                  |               | 650           | φ53.1 | φ93.7  |
|                                  |               | 700           | φ56   | φ100   |
|                                  |               | 750           | φ53.1 | φ100   |
|                                  |               | 800           | φ56   | φ106.3 |
| 850                              | φ53.1         | φ106.3        |       |        |

### Feature Picture of Plastic Poly-V Belt Conveyor Roller Tapered Drum For Curved Conveyor

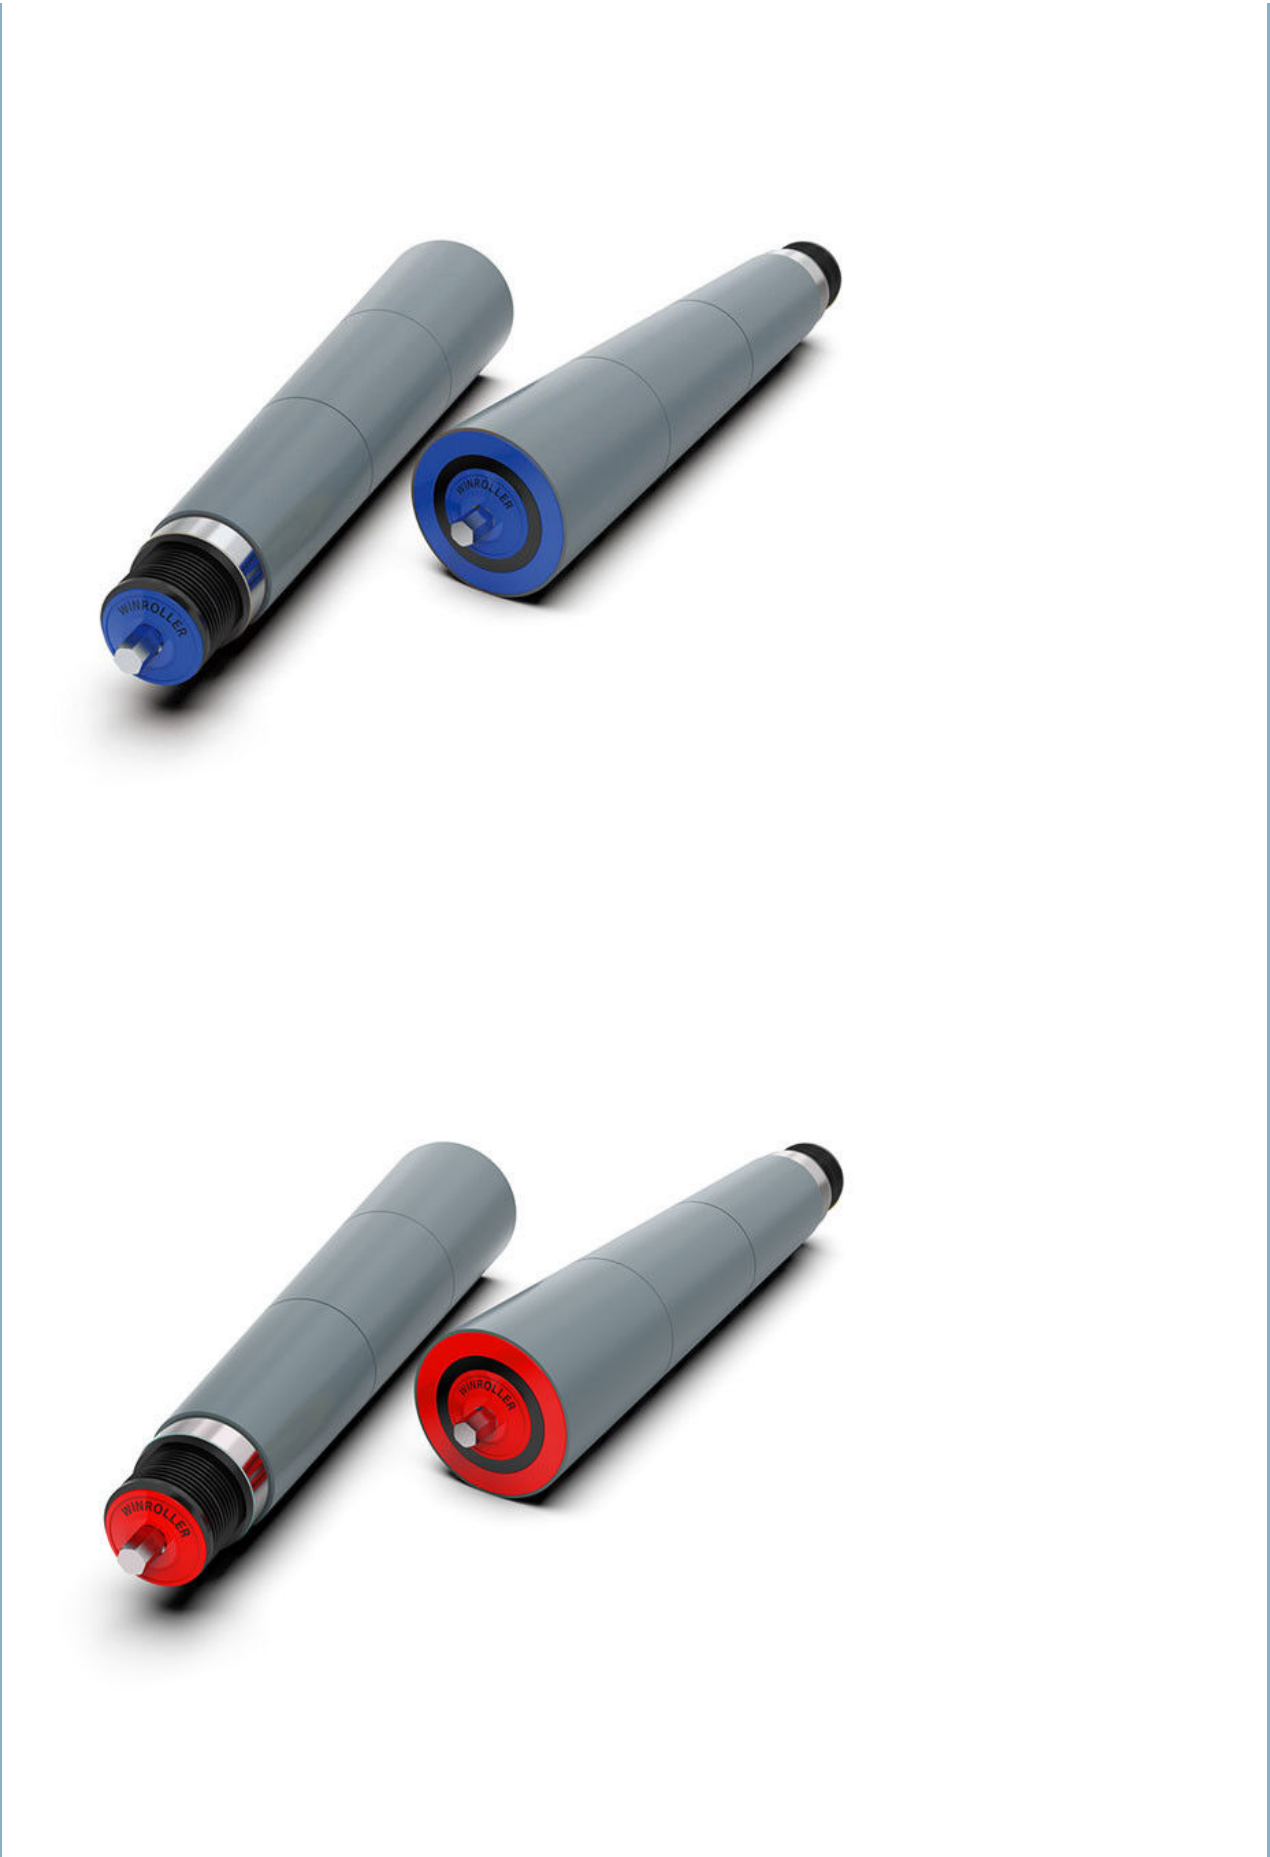

**WIN ROLLER JIANG SU Winroller Technology Co., Ltd.**

+86 18168399322    winroller.market@gmail.com    drum-roller.com

No. 7, Xiye Road, Huishan District, Wuxi City, Jiangsu Province, China